

# BORN FOR SAFETY

Intrinsically Safe DMR Portable Two-way Radio  
HP79XC



For workers in the Oil and Gas industry or firefighters in the Fire and Rescue, they operate in extreme conditions and take risks from explosive gas, combustible dusts, or chemical vapors. In the dangerous environments, safe, reliable, and high-efficient communication is paramount.

The HP79XC intrinsically safe DMR portable two-way radio leverages Hytera's 20 years of experience and expertise in explosion protection to take personal safety and mission-critical communications to a new level for the workers in oil and gas, mining, chemical, pharmaceuticals, and other industries with hazardous environments.

Certified with IECEx/ATEX, the HP79XC is the safest radio to keep the workers connected in hazardous environments without causing a fire or explosion. HP79XC has IS circuit, long-lasting explosion-proof battery, superior audio, extended radio coverage, and advanced ergonomics for easy operation.









### Fire and Rescue

When firefighters make efforts to protect lives and properties in a place full of smoke, dust, and even toxic gas, the HP79XC provides safe and effective communications for them

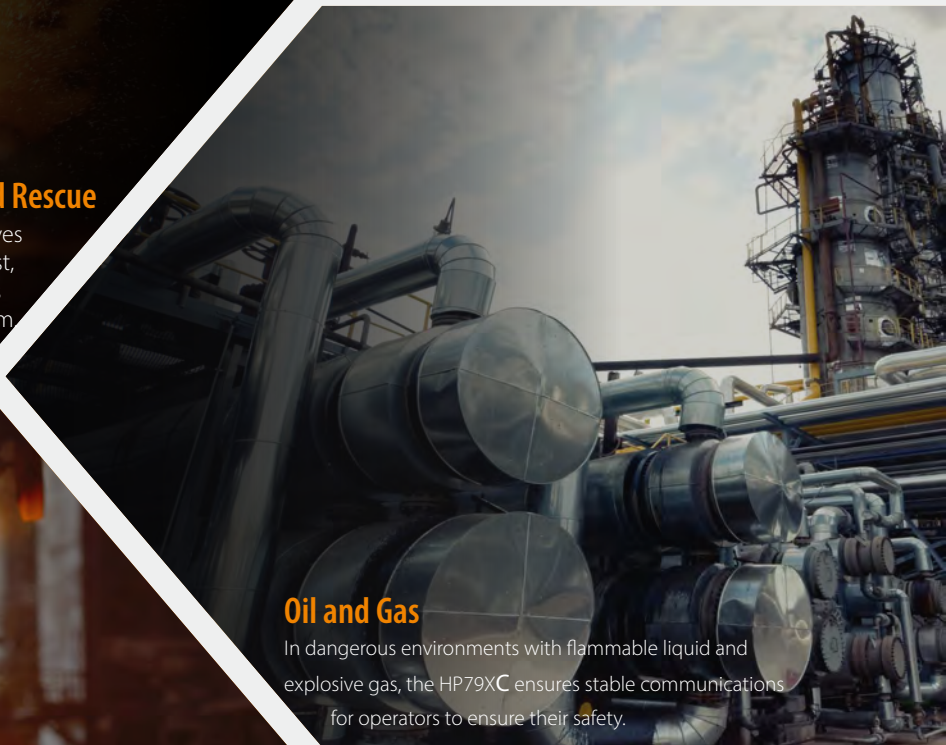

### Oil and Gas

In dangerous environments with flammable liquid and explosive gas, the HP79XC ensures stable communications for operators to ensure their safety.

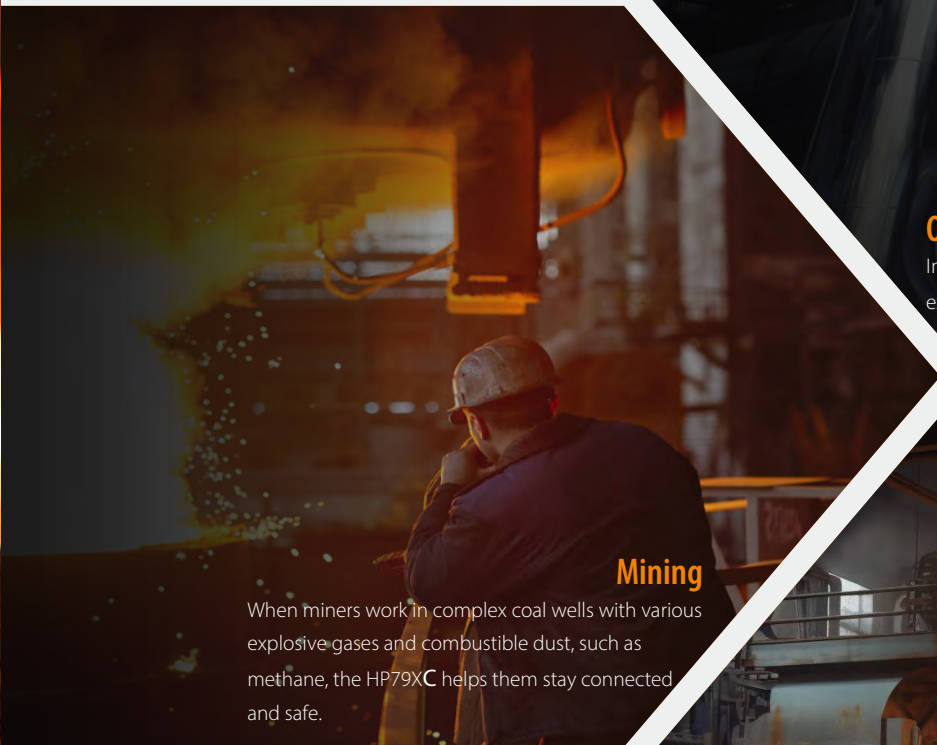

### Mining

When miners work in complex coal wells with various explosive gases and combustible dust, such as methane, the HP79XC helps them stay connected and safe.



### Manufacturing

In pharmaceutical processing, steel plant, food processing, and more industries where the chances of massive dust explosions are high, the HP79XC with a higher IS level can keep the workers safe by reliable communications.



### Airport

In the airport with complex facilities that are exposed to fuels, the HP79XC offers the staff and on-site fire crew with instant and efficient communications.



### Chemical Plant

In the chemical plant where the conversion and processing of flammable gases, liquids, and solids may lead to explosion, the HP79XC ensures stable communications for safe production.





## ULTIMATE SAFETY

The HP79XC intrinsically safe radio is certified to standards listed by IECEx. It has been developed to provide safe and reliable communication in hazardous environments by adopting the new materials, brand-new structural design and innovative IS circuit. With optimized RF solution and pioneering audio solution, it extends communication range and provides better audio. Moreover, the HP79XC prepares for the unexpected before it really happens, thanks to lone worker, man down, and precise positioning.

### IECEx

Ex ib I Mb  
Ex ib IIC T4 Gb  
Ex ib IIIC T120°C Db  
IP66/IP67/IP68, -25°C ≤ Ta ≤ +60°C

### ATEX

I M2 Ex ib I Mb  
II 2G Ex ib IIC T4 Gb  
II 2D Ex ib IIIC T120°C Db  
IP66/IP67/IP68, -25°C ≤ Ta ≤ +60°C


### US

Class I, Zone 1, AEx ib IIC T4 Gb  
Zone 21, AEx ib IIIC T120°C Db  
IP66/IP67/IP68, -25°C ≤ Ta ≤ +60°C

### CA

Ex ib IIC T4 Gb  
Ex ib IIIC T158°C Db  
IP66/IP67/IP68, -25°C ≤ Ta ≤ +60°C




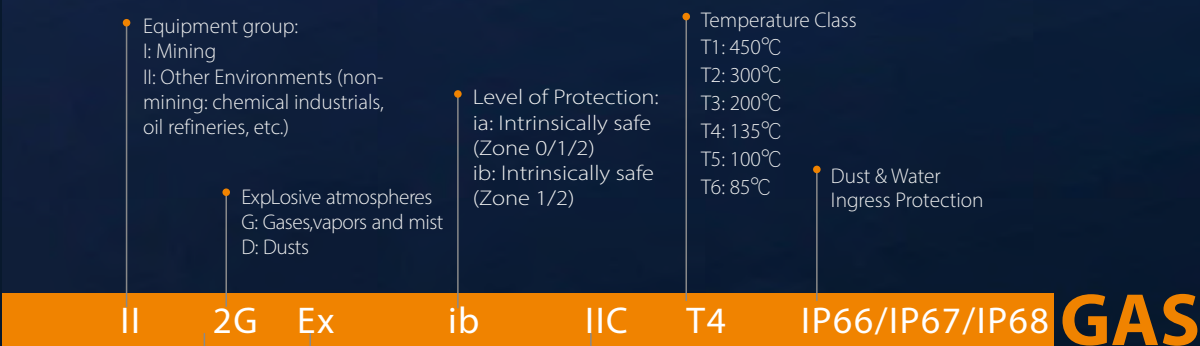

Explosion-proof Standard:  
EU ATEX directive  
and IECEx standards

Gas Group:  
I: Methane (Mining)  
IIA: Propane  
IIB: Ethylene  
IIC: Acetylene, hydrogen  
(Hazard Level: IIC>IIB>IIA)

Classification for hazardous places  
1: Very high level (zone 0 or zone 20)  
2: High level (zone 1 or zone 21)  
3: Normal level (zone 2 or zone 22)  
Zone 0: present continuously  
Zone 1: present intermittently  
Zone 2: present abnormally

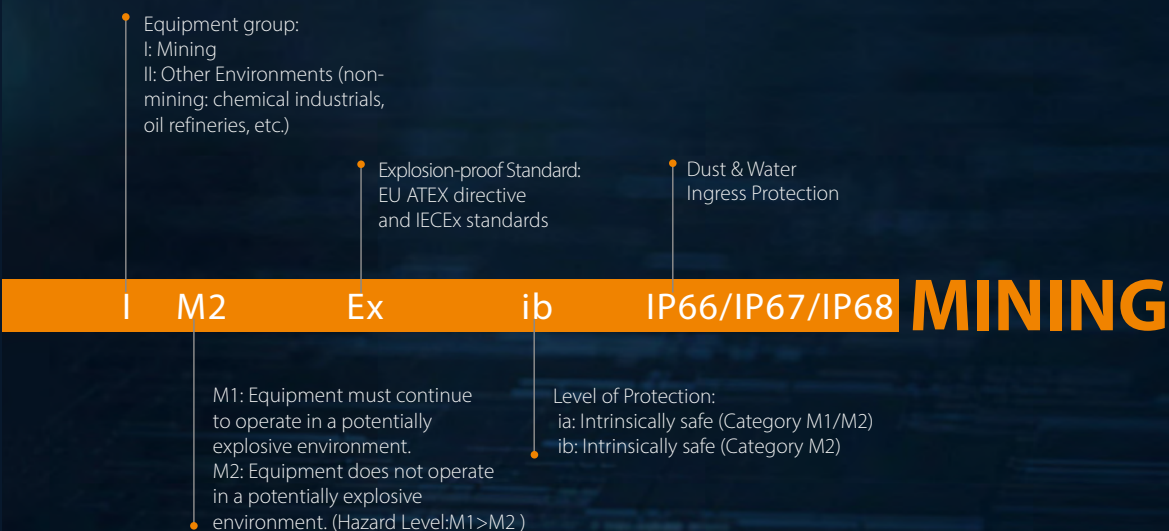





## Born for Safety




### Wider range of operation temperature (in Ex area)

Thanks to new explosion-proof materials and advanced mechanical design, the HP79XC is built to work under temperatures from  $-25^{\circ}\text{C}$  to  $60^{\circ}\text{C}$  in explosion-prone areas. With stable and even heat dissipation, the HP79XC is engineered to work in the extreme conditions, bringing extra safety and efficiency to everyday work.



### More powerful intrinsically safe circuit

The HP79XC adopts innovative silicone encapsulation technology to prevent liquid, inflammable dust, or explosive gas from intruding internal circuits. With multiple circuit protection mechanisms, the HP79XC strictly limits the electrical circuit's energy to a non-ignitable level during operation. Meanwhile, the circuit contributes to 2W TX power and 2-watt audio power, extending the communications distance and boosting the audio loudness.

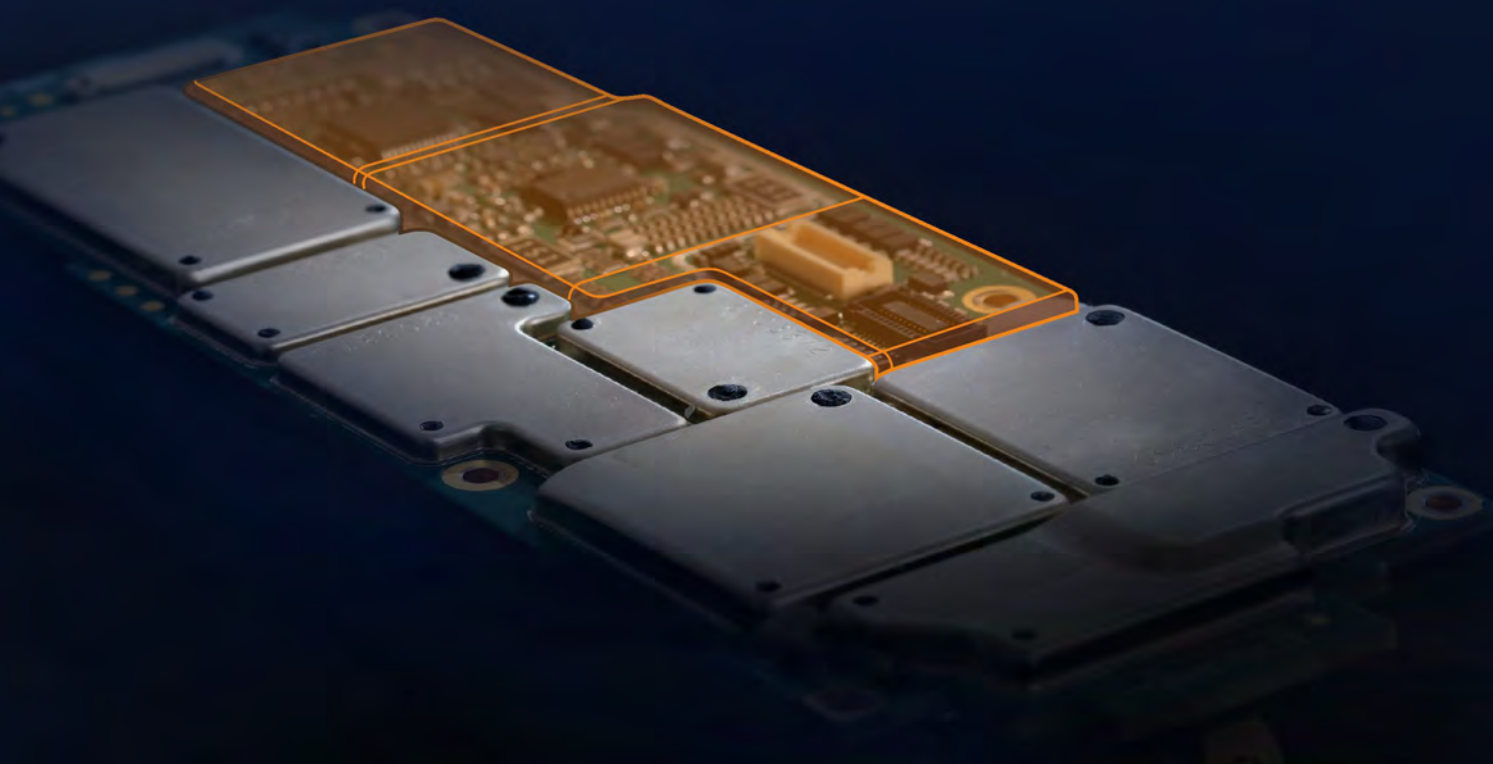

## More rock-solid IS battery

The IS battery is secured to the radio by battery protection plate and an anti-falling battery latch. Even if the HP79XC is dropped by accident, the battery will never become detached to avoid potential sparks in hazardous circumstances. In addition, the HP79XC is forbidden to be used with non-original battery with prompt on screen and flashing red LED indicator, as the safety of life and property cannot be endangered by any risks.

## More professional anti-static technology

Electrostatic discharges are a source of ignition in explosive risk areas. Taking this in mind, the HP79XC first adopts high-strength, explosion-proof materials to prevent static electricity on the surface. Then the HP79XC uses a dual-material technology to resist the build-up of static electricity. So the workers can freely use the HP79XC without worrying the threats to lives and properties from the brisk fire or massive explosion.







## Reliable to Use



### Rugged-tested trust

The HP79XC is certificated with IP6X and MIL-STD-810H after a whole list of reliability tests such as accelerated life testing, impact test for the radio with 2.4-inch screen, and drop test. It is rugged enough to withstand dust, shock, or sudden drop. The workers can use the radio whatever harsh environments they encounter.



### Dual antimagnetic mechanism

In the area containing metallic compounds, the HP79XC resists magnetic metal dust and shavings from the environments to damage the speaker — ensuring more outstanding audio and longer service life. All lies in the dual antimagnetic mechanism.







## HIGH EFFICIENCY COMMUNICATIONS

The HP79XC takes critical communications to a new level, with the efforts of Hytera Audio Lab, RF & Antenna Lab, Energy-efficient Lab, and UX Design Lab\*. The HP79XC keeps the workers always connected, from superior audio quality to extended radio range. The HP79XC is always in uptime thanks to the long-lasting battery. Moreover, the HP79XC facilitates the usage and management in terms of versatile connectivity and easy-to-use design.

\* Hytera Professional Lab.



## Superior Audio Quality

### Super loudness

Most explosion-prone environments are noisy, thus how to provide clear and loud audio is the key to ensure effective communication among team members. The HP79XC, with a lighter and slimmer body, has a 2W speaker to deliver louder audio to improve team collaboration and work efficiency.

## Ultra Clarity

With cutting-edge audio processing technology adopted, the HP79XC delivers crisp, clear audio even in complex environments, ensuring more reliable mission-critical and business-critical communications.

### AI-based noise cancellation

The HP79XC adopts the most advanced AI-based noise cancellation algorithm and gets machine learning behavior. After learning and training thousands of noise samples, the HP79XC can quickly separate the human voice from the noise, making the workers get the right commands from the first word.

### Automatic gain control

Automatic gain control (AGC) automatically increases or decreases microphone gain to ensure consistently loud and clear audio output, regardless of how softly or loudly the workers are talking into the microphone.

### Water-porting design

The speaker has a unique water-porting design that can automatically expel water from the speaker's acoustic cavity fast. Even in heavy downpours, the HP79XC can still deliver clear audio.

### Howling suppression

Using the innovative howling suppression algorithm, the HP79XC eliminates a screeching feedback sound when two radios are too close, even 30 cm away from each other.







## Long-lasting Battery

The standard 2150 mAh battery, together with the cutting-edge low power consumption technology, can outlast the shift. The workers can check the remaining battery and battery health on the radio and extend the battery life using the smart charger.



## Extended Radio Range

Thanks to the new-designed powerful IS circuits and RF optimization solution, HP79XC features 2W transmitting power and industry-leading receiving sensitivity ( $0.16\mu\text{V}$ ), providing more smooth communications even at a distance or in the edge area, further enhancing personal safety and work efficiency.



# Easy to Use



## About 390g (with standard battery and antenna)

- Comfortable for long-time grip

## 2.4-inch LCD screen

- Intuitive to operate the radio or view the info

## Textured housing on the back

- Never slip down from your fingers



## U-shaped groove

- Quick to attach and release the belt clip

## Large LED indicator

- Easy to get the radio status

## Vibration pattern

- Never miss any call and message



## Purpose-built knob and keys

- Volume/channel selector knob
- Enlarged emergency key
- Three programmable keys
- Tactile and textured keys
- Four navigation keys

## User-friendly UI

- 9-grid menu
- Conversational SMS interface
- Pop-up notification on home screen



# At a Glance



# SPECIFICATIONS

| General                         |                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------|
| Frequency Range                 | VHF: 136-174MHz                                                                    |
| Channel Capacity                | 1024                                                                               |
| Zone Capacity                   | 64                                                                                 |
| Channel Spacing                 | 12.5kHz/20kHz/25kHz                                                                |
| Operating Voltage               | 7.4V (rated)                                                                       |
| Battery                         | 2150 mAh IIC intrinsically safe Li battery (Typical)                               |
| Battery Life (5/5/90)           | 24h (GNSS OFF)<br>21h (GNSS ON)                                                    |
| Frequency Stability             | ±0.5ppm                                                                            |
| Antenna Impedance               | 50Ω                                                                                |
| Dimensions (H x W x D)          | 130 x 55 x 37mm                                                                    |
| Weight (with antenna & battery) | about 390g                                                                         |
| Display                         | 2.4 inch LCD, 320 x240 pixel, 262000 colors                                        |
| Receiver                        |                                                                                    |
| Sensitivity                     | Analog: 0.16μV(12dB SINAD)<br>0.14μV(Typical)(12dB SINAD)<br>Digital: 0.16μV/BER5% |
| Adjacent Channel Selectivity    | TIA-603: 60dB@12.5kHz; 70dB@20/25kHz<br>ETSI: 60dB@12.5kHz; 70dB@20/25kHz          |
| Intermodulation                 | TIA-603: 70dB@12.5/20/25kHz<br>ETSI: 65dB@12.5/20/25kHz                            |
| Spurious Response Rejection     | TIA-603: 70dB@12.5/20/25kHz<br>ETSI: 70dB@12.5/20/25kHz                            |
| Blocking                        | TIA-603: 80dB   ETSI: 84dB                                                         |
| Hum and Noise                   | 40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz                                               |
| Rated Audio Power Output        | 0.5W                                                                               |
| Rated Audio Distortion          | ≤3%                                                                                |
| Audio Response                  | +1 ~ -3dB                                                                          |
| Conducted Spurious Emission     | <-57dBm                                                                            |
| Transmitter                     |                                                                                    |
| RF Power Output                 | 2W/1W                                                                              |
| FM Modulation                   | 11K0F3E@12.5kHz<br>14K0F3E@20kHz<br>16K0F3E@25kHz                                  |
| 4FSK Digital Modulation         | 12.5kHz Data Only: 7K60FXD<br>12.5kHz Data and Voice: 7K60FXW                      |
| Conducted/Radiated Emission     | -36dBm < 1GHz; -30dBm > 1GHz                                                       |
| Modulation Limiting             | ± 2.5kHz@12.5kHz; ± 4.0kHz@20kHz; ± 5.0kHz@25kHz                                   |
| FM Hum & Noise                  | 40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz                                               |
| Adjacent Channel Power          | 60dB@12.5kHz; 70dB@20/25kHz                                                        |
| Audio Response                  | +1 to -3dB                                                                         |
| Audio Distortion                | ≤3%                                                                                |
| Digital Vocoder Type            | AMBE+2™                                                                            |
| Digital Protocol                | ETSI-TS102 361-1, -2, -3                                                           |
| Environmental                   |                                                                                    |
| Operating Temperature           | -30°C to +60°C (in non-hazardous area)<br>-25°C to +60°C (in hazardous area)       |
| Storage Temperature             | -40°C~ +85°C                                                                       |
| ESD                             | IEC 61000-4-2 (Level 4)<br>±8kV (contact);<br>±15kV (air)                          |
| Dustproof & Waterproof          | IP64/IP65/IP66/IP67/IP68 per IEC-60079-0:2017 & IEC-60529                          |
| Humidity                        | MIL-STD-810H                                                                       |
| Shock and Vibration             | MIL-STD-810H                                                                       |

# Standard Accessories



Battery  
(Standard Capacity)



Charger



Power Adapter



Antenna



Belt Clip



Strap

# Optional Accessories



Remote speaker  
Microphone



Earpiece



Carry Case



Intrinsically Safe  
Hamlet Heavy Duty  
Noise-cancelling Headset kit



Intrinsically  
Safe and Adjustable Earset



Intrinsically  
Safe Large PTT





## Hytera Communications Corporation Limited

**Stock Code:** 002583.SZ

**Address:** Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road,  
Nanshan District, Shenzhen, P.R.C.

**Tel:** +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057

**Http:** [www.hytera.com](http://www.hytera.com) [marketing@hytera.com](mailto:marketing@hytera.com)



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

**HYT**, Hytera are registered trademarks of Hytera Communications Corp., Ltd.  
©2023 Hytera Communications Corp., Ltd. All Rights Reserved.